UNIVERSAL LEVELLING SYSTEM

Thomas Dudley Utility Products universal levelling system ensures ironwork is set at the right height and parallel to the road surface.

- Assemble the screws to each levelling device (See Fig.1), setting the adjustment screws to the approximate required installation height (See Fig.2).
- Fit one levelling device to each corner of the frame (See Fig.1).
- Position the frame on the chamber, ensuring the frame flange will be fully supported.
- Set the adjustment screws until the frame is level with the road surface, ensure there is a minimum 20mm gap for bedding mortar (See Fig.2).
- Follow the Thomas Dudley Installation Guide to complete installation of the frame.

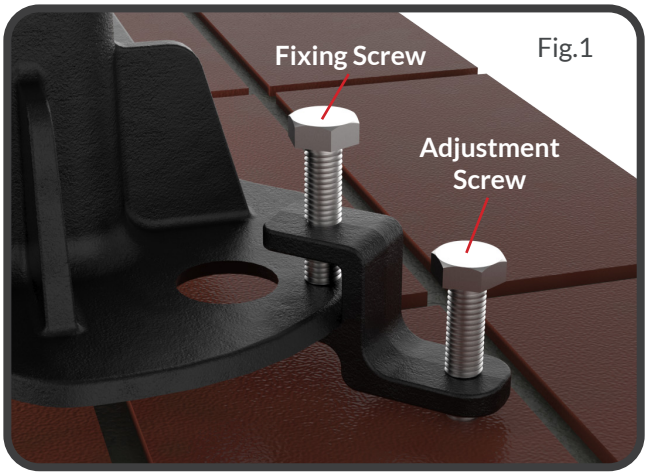


Fig.1

Pack Contents -

4 x Levelling Device
8 x Screws

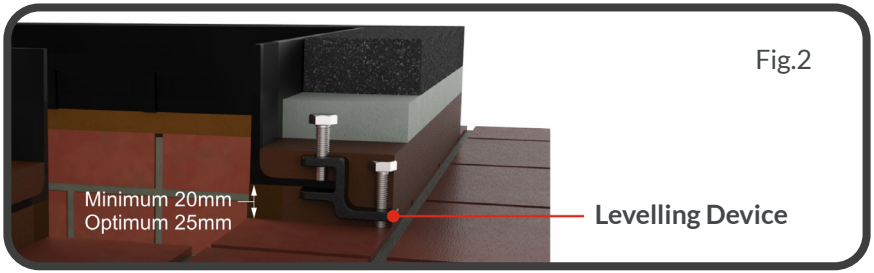


Fig.2

295 Birmingham New Road, Dudley, West Midlands, DY1 4SJ
0121 521 2503 foundrysales@thomasdudley.co.uk
www.tdfoundry.co.uk
Thomas Dudley Utility Products

UTILITY PRODUCTS THOMAS DUDLEY TD