

B125KM HINGED GULLY GRATING & FRAME



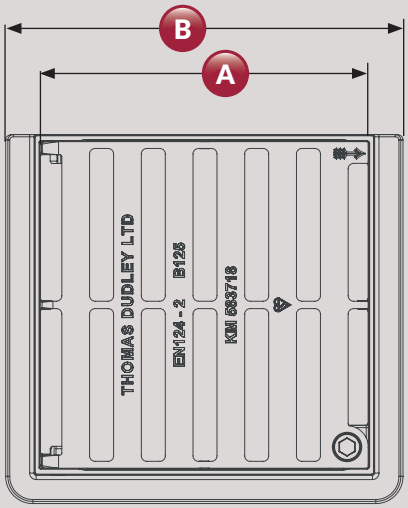

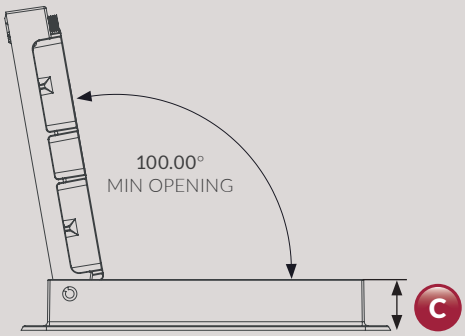

KEY FEATURES

COMPLIES WITH BS EN 124-2

INTERFERENCE HINGE

LOAD RATED TO B125

SECURE, TAMPER-PROOF LOCK & NON-LOCK VERSIONS

- Complies fully with BS EN 124-2:2015 Standard - suitable for intensity of traffic in Class B125 applications
- Engineered from quality assured ductile iron
- Tight fit, non rattle interference hinge
- Secure, tamper-proof lock and non-lock versions

CLEAR OPENING (A) MM	OVER FRAME (B) MM	CD526 GRATING TYPE	FLANGE DESIGN	DEPTH (C) MM	WATERWAY	STYLE	UN-LOCKED CODE	LOCKED CODE
225 x 225	290 x 264	N/A	3 - SIDE	50	242CM²	FLAT	333009	334558
225 x 225	290 x 264	N/A	3 - SIDE	50	244CM²	DISHED	332131	334559
300 x 300	365 x 339	TYPE T	3 - SIDE	50	400CM²	FLAT	333615	334560
300 x 300	365 x 339	TYPE T	3 - SIDE	50	402CM²	DISHED	332133	334561

TD THOMAS | DUDLEY

Thomas Dudley Utility Products
295 Birmingham New Road, Dudley, West Midlands, DY1 4SJ
0121 521 2500
utilitysales@thomasdudley.co.uk
www.tdfoundry.co.uk

UTILITY PRODUCTS TD