

C250KM HINGED GULLY GRATING & FRAME



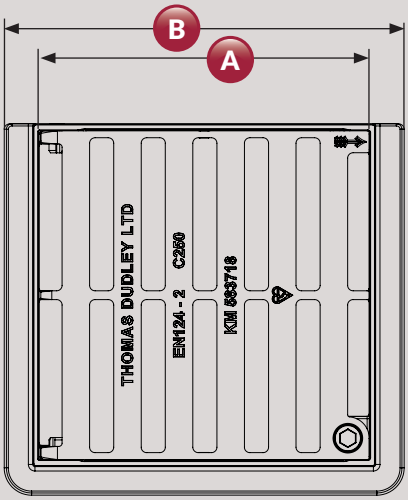

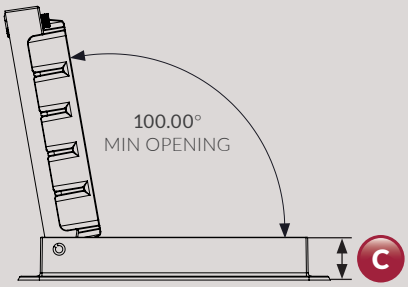

KEY FEATURES

COMPLIES WITH BS EN 124-2

INTERFERENCE HINGE

LOAD RATED TO C250

SECURE, TAMPER-PROOF LOCK & NON-LOCK VERSIONS

- Complies fully with BS EN 124-2:2015 Standard- suitable for intensity of traffic in Class C250 applications
- Engineered from quality assured ductile iron
- Tight fit, non rattle interference hinge
- Secure, tamper-proof lock and non-lock versions

CLEAR OPENING (A) MM	OVER FRAME (B) MM	CD526 GRATING TYPE	FLANGE DESIGN	DEPTH (C) MM	WATERWAY	STYLE	UN-LOCKED CODE	LOCKED CODE
225 x 225	290 x 264	N/A	3 - SIDE	50	239CM²	FLAT	333613	334562
225 x 225	290 x 264	N/A	3 - SIDE	50	236CM²	DISHED	333611	334563
300 x 300	365 x 339	TYPE T	3 - SIDE	50	403CM²	FLAT	333584	334564
300 x 300	365 x 339	TYPE T	3 - SIDE	50	399CM²	DISHED	332798	334565

TD THOMAS | DUDLEY

Thomas Dudley Utility Products
295 Birmingham New Road, Dudley, West Midlands, DY1 4SJ
0121 521 2500
utilitysales@thomasdudley.co.uk
www.tdfoundry.co.uk

UTILITY PRODUCTS TD