
F900KM HINGED DOUBLE TRIANGULAR GULLY GRATING & FRAME



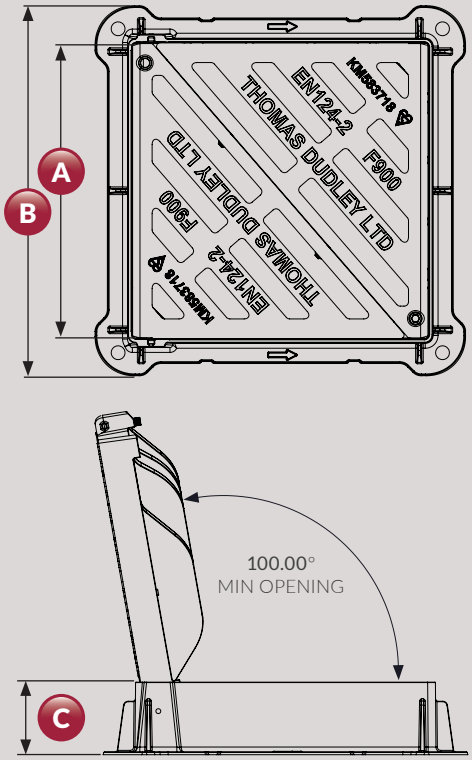

KEY FEATURES

COMPLIES WITH BS EN 124-2

PATENTED HINGE

LOAD RATED TO F900

3 POINT CONTACT

- Complies fully with BS EN 124-2:2015 - suitable for intensity of traffic in Class F900 applications
- Engineered from quality assured ductile iron
- 450sq - Tight fit, non rattle interference hinge
- Available with secure, tamper-proof lock and non-lock options
- 600sq - Lift out covers providing 135° hinging giving superior site safety and one man operation

CLEAR OPENING (A) MM	OVER FRAME (B) MM	TYPE	FLANGE DESIGN	DEPTH (C) MM	WATERWAY	CD526 GRATING TYPE	STYLE	UNLOCKED CODE	LOCKED CODE
600 x 600	754 x 754	GRATE & FRAME	4 - SIDE	150	1048CM²	TYPE R	FLAT	N/A	334327
450 x 450	630 x 630	GRATE & FRAME	4 - SIDE	150	724CM²	TYPE S	FLAT	372078	374911

TD THOMAS | DUDLEY

Thomas Dudley Utility Products
295 Birmingham New Road, Dudley, West Midlands, DY1 4SJ
0121 521 2500
utilitysales@thomasdudley.co.uk
www.tdfoundry.co.uk

UTILITY PRODUCTS TD