
FACTA B


MULTI-INFILL SLIDE-OUT RECESSED TRAY


UTILITY PRODUCTS TD

Specification Info:

- Multi-Infill Recessed Tray.
- Double EPDM rubber gasket airtight sealed (-20 to +100 degree C).
- 4 Screw locked.
- M10 threaded corner lifting points.
- Bars in base for floor finish bedding tie in.
- Galvanised and certified to BS EN ISO 1461.

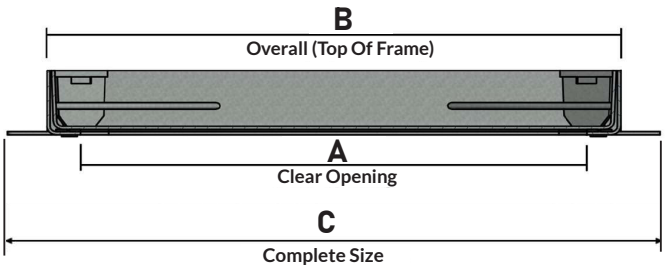

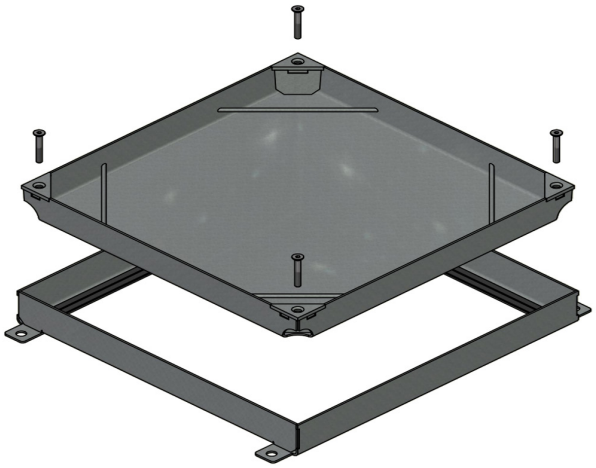

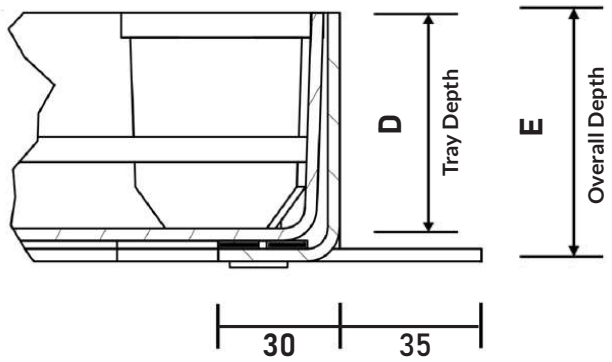

A	B	C	D	E	Code
300 x 300mm	360 x 360 mm	430 x 360mm	52mm	60mm	378922
300 mm dia *	360 x 360 mm	430 x 360mm	52mm	60mm	378923
450 x 450mm	510 x 510mm	580 x 510mm	52mm	60mm	378924
450 mm dia *	510 x 510mm	580 x 510mm	52mm	60mm	378925
600 x 450mm	660 x 510 mm	660 x 580mm	52mm	60mm	378926
600 x 600mm	660 x 660 mm	730 x 660mm	52mm	60mm	378927
675 x 675mm	735 x 735 mm	805 x 735mm	52mm	60mm	378928
750 X 600mm	810 x 660 mm	810 x 730mm	52mm	60mm	378929
750 x 750mm	810 x 810 mm	880 x 810mm	52mm	60mm	378930
900 x 600mm	960 x 660mm	960 x 730mm	52mm	60mm	378931

* Square to round designs. Circular openning to suit PPIC.

Loading:

FACTA B:

- 5 tonne slow moving wheel load.
- 25 tonne gross laden vehicle weight.
- Loading based on being filled with C30 concrete.
- PN - Steel equivalent loadings to BS EN 124 but for slow moving areas of 20mph or less.

Accessories:

- M10 threaded lifting key (each). Code (379209)
- M12 through bolts for frame fixing (4no). Code (379211)
- Replacement locking screws (4no M8x60mm CSK allen head machine screw). Code (379213)
- Upgrade security screws (4no M8x60mm CSK torx-pin head machine screw). Code (379214)
- Replacement EPDM rubber seal (10x5mm self-adhesive). Code (379210)
- 5mm allen key. Code (379201)
- T40 Torx pin key. Code (379199)

Multi-Infill:

As standard the cover can take all infills:

- Screed/Concrete infill with finishes like Vinyl, Laminate, Tile, Carpet and Wood.
- Screed/Cement bedding and solid infills like Porcelain and Sandstone. Anything up to 30mm depth.
- Screed/Cement bedding and decorative infills like Textured Concrete and Resin Bound Gravel.

By removing tie bars on site, they can take infills:

- Cement bedding and Concrete Paving Slabs.
- Resin bonding and Granite Sets or Block Paving. Anything up to 50mm depth.

Fitting:

- Unit must be fitted with cover in the frame.
- Minimum 25mm rapid set bedding mortar recommended.
- Additional concrete surround of 30mm covering in building in lugs.
- Alternatively, the frame can be bolted down through the 13mm holes in the lugs. Fixings not provided – see accessories.
- Leave screws in unit when filling with screed and floor finish.

Access:

- Cover to be lifted using M10 threaded lifting keys via threaded lifting points.
- 4no lifting keys required for two-person lift-out.

Maintenance:

- 6-month maintenance recommended.
- Removal of screws and re-greasing.
- Removal of cover and light brush to clean debris from frame seating.
- Visual check of EPDM rubber gasket seal (replace if missing or broken).
- Ensure screws aren't cross threaded when refitting.
- M8 tap required for rivet-nuts if thread gets damaged.

Special Options:

- Plain seated – unsealed (Unlocked).
- Single EPDM rubber sealed (Unlocked).
- Triple sealed – double EPDM rubber sealed and locked, c/w additional inner sealing plate (Airtight and water resistant).
- Security screw locking (Torx-pin).
- Any tray/overall depth required. (Some standard depths - 40mm, 75mm, 80mm, 100mm).
- Stainless steel decorative edge.
- Fully stainless (Grade 304).
- Fully stainless (Grade 316).

TD THOMAS | DUDLEY

Thomas Dudley Utility Products
295 Birmingham New Road, Dudley, West Midlands, DY1 4SJ
0121 521 2503
utilitysales@thomasdudley.co.uk
www.tdfoundry.co.uk

UTILITY PRODUCTS TD