
# FACTA D

## RECESSED FOR BLOCK INFILL


UTILITY PRODUCTS TD

## Specification Info:

- Recessed cover for block infill.
- Plain seated (Unsealed) – Unlocked.
- Heavy duty corner lifting points.
- 100mm tray depth.
- Plain internal tray for bedding and block infill.
- Galvanised and certified to BS EN ISO 1461.

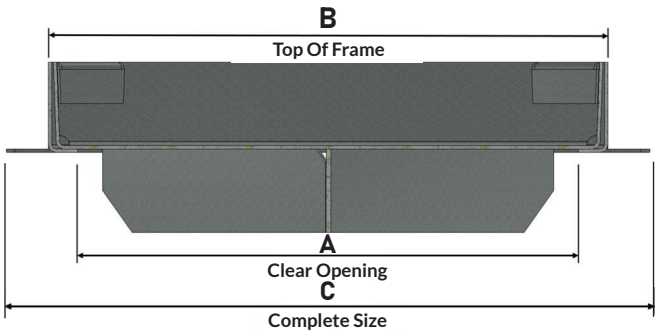

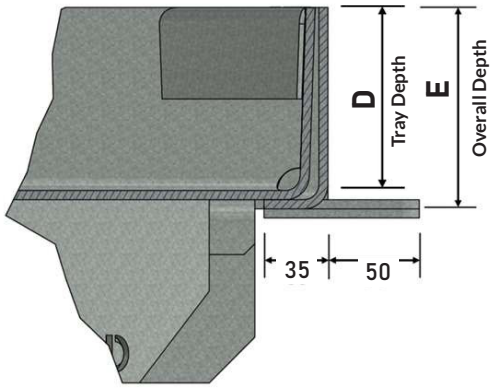


| A | B | C | D | E | Code |
|---|---|---|---|---|---|
| 300 x 300mm | 370 x 370mm | 470 x 370mm | 100mm | 110mm | 378683 |
| 450 x 450mm | 520 x 520mm | 620 x 520mm | 100mm | 110mm | 376323 |
| 600 x 450mm | 670 x 520mm | 670 x 620mm | 100mm | 110mm | 378684 |
| 600 x 600mm | 670 x 670mm | 770 x 670mm | 100mm | 110mm | 376290 |
| 675 x 675mm | 745 x 745mm | 845 x 745mm | 100mm | 110mm | 378685 |
| 750 X 600mm | 820 x 670mm | 820 x 770mm | 100mm | 110mm | 378686 |
| 750 x 750mm | 820 x 820mm | 920 x 820mm | 100mm | 110mm | 378687 |
| 900 x 600mm | 970 x 670mm | 970 x 770mm | 100mm | 110mm | 378688 |

## Loading:

FACTA D:

- 11 tonne slow moving wheel load.
- 44tonne gross laden vehicle weight.

PN - Steel equivalent loadings to BS EN 124 but for slow moving areas of 20mph or less.

## Accessories:

- Heavy duty short handle lifting key (Each) Code 379206
- M12 through bolts for frame fixing (4no) Code 379211
- Heavy duty long handle lifting key (Each) Code 379207

## Infill:

As standard the cover can take all infills:

- Sand and cement bedding and a maximum block depth of 80mm.
- Bedding and solid infills like tactile paving, granite sets, concrete slabs etc.
- Sand and cement bedding and a final tarmac finish.

## Fitting:

- Unit must be fitted with cover in the frame.
- Minimum 25mm rapid set bedding mortar recommended.
- Additional concrete surround of 30mm covering in building in lugs.
- Alternatively, the frame can be bolted down through the 13mm holes in the lugs. Fixings not provided – see accessories.

## Access:

- Cover to be lifted using heavy duty lifting keys via corner lifting points.
- 4no lifting keys required for two-person lift-out.

## Maintenance:

- 6-month maintenance recommended.
- Removal of cover and light brush to clean debris from frame seating.

## Special Options:

- Single EPDM rubber sealed (Unlocked).
- Double EPDM rubber sealed (Locked).
- Triple sealed – double sealed and locked, c/w additional inner sealing plate (Airtight and water resistant).
- Allen head screw locking.
- Security screw locking (Torx-pin).
- Any tray/overall depth required. (Some standard depths - 60mm, 80mm, 120mm and 150mm).
- Square to round, Circular opening to suit PPIC.
- Fully stainless (Grade 304).
- Fully stainless (Grade 316).

TD THOMAS | DUDLEY

Thomas Dudley Utility Products
295 Birmingham New Road, Dudley, West Midlands, DY1 4SJ
0121 521 2503
utilitysales@thomasdudley.co.uk
www.tdfoundry.co.uk

UTILITY PRODUCTS TD